

ascaso
for coffee lovers



SPARE PARTS

Disclaimer: This intended as a guide only. We accept no responsibility for physical or personal damage .



Replacing the Dream thermostat gauge



ascaso
for coffee lovers

—●—
SPARE PARTS



Fig.1 Remove 2 long screws



Old model


You will need a Philips screwdriver, *It takes 5 min to do.*

1. Plug out machine.
2. **Make sure machine is cold before you do this**
3. Remove top, unscrewing 2 long screws underneath, near the coffee group. **Fig.1**
4. Remove Temperature gauge copper probe by unscrewing bracket screw .
(This can be in different places on the boiler depending on your model)
- Remove the bracket screw **Fig.2** holding the copper end in place, bracket and screw will come away. Remove the bracket screw holding the Gauge in place, **Fig.3** bracket and screw will come away. Pop the gauge off, by pressing the gauge with your thumb from the front of the machine.
4. Replace with new gauge and screw back the brackets.
5. Replace the lid, turn on machine and all should be ok.

Fig 2 Temperature probe Screw



Fig 3 Temperature gauge bracket Screw

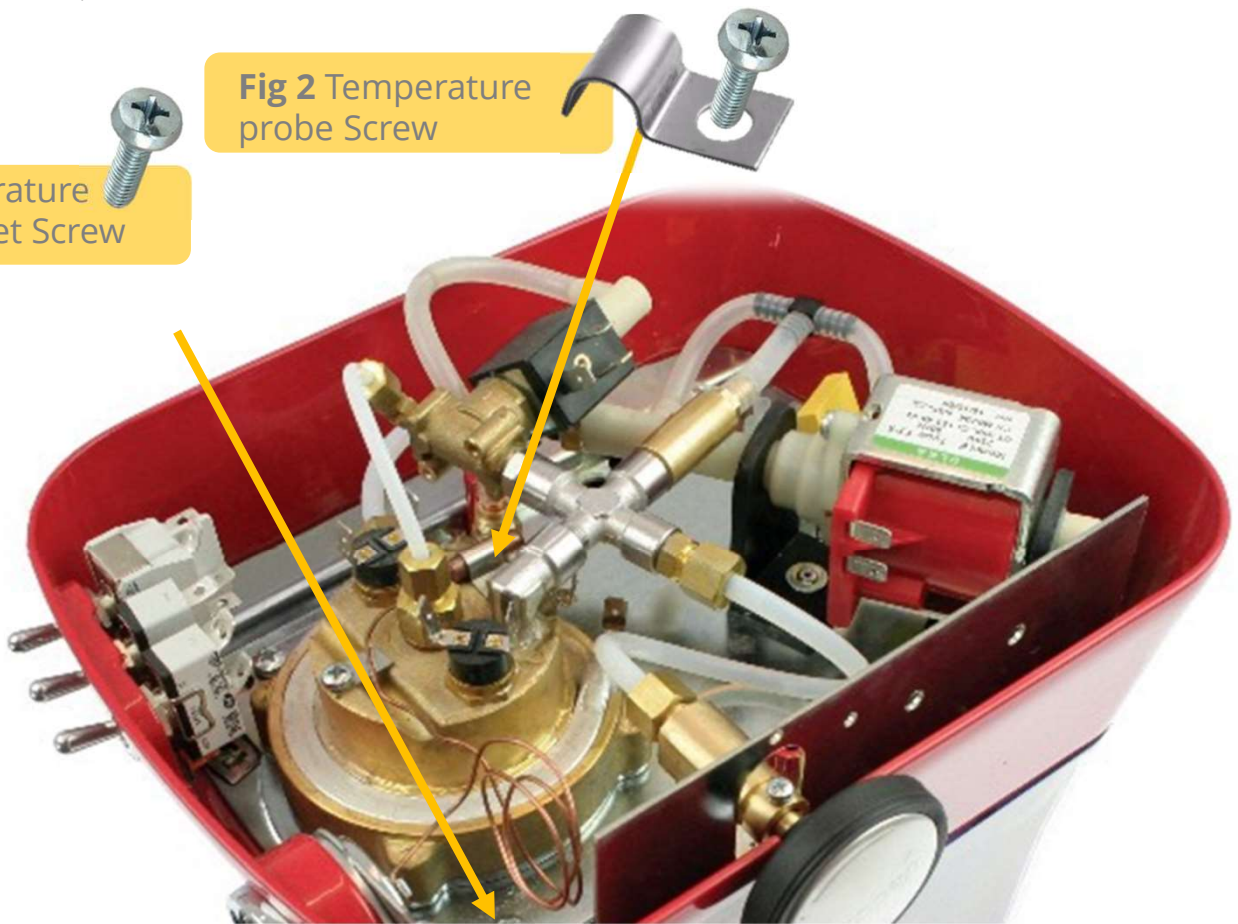



New model



Fig.1 Remove 2 long screws



You will need a Philips screwdriver, *It takes 5 min to do.*

1. Plug out machine.
2. **Make sure machine is cold before you do this**
3. Remove top, unscrewing 2 long screws underneath, near the coffee group. **Fig.1**
4. Remove Temperature gauge copper probe by unscrewing bracket screw .
(This can be in different places on the boiler depending on your model)
Remove the bracket screw **Fig.2** holding the copper end in place, bracket and screw will come away. Remove the bracket screw holding the Gauge in place, **Fig.3** bracket and screw will come away. Pop the gauge off, by pressing the gauge with your thumb from the front of the machine.
4. Replace with new gauge and screw back the brackets.
5. Replace the lid, turn on machine and all should be ok.

Fig 2 Temperature probe Screw



Fig 3 Temperature gauge bracket Screw

